

Fairfield

V220/A EXPOSED 3/4"

THERMOSTATIC SHOWER

INSTALLATION INSTRUCTIONS

Remove the valve body from its back plate by releasing the grub screw.
Set the valve body back plate at the required height then mark and drill screw holes and fix the back plate.

Fit both supply elbows to the valve then offer the valve to the back plate to allow you to mark off the supply lines.

Fit the valve-valve coupler to the valve body, ensuring the 'o' ring is well lubricated (spares included).

Torque into place using a 5/8" hex key. Fit the volume control including its back plate to the valve-valve coupler.

With the valve body fitted to its back plate, mark around the volume control back plate (thus achieving a template) then remove the valve body, direct coupler and volume control complete.

Remove the volume control back plate by releasing the grub screw and place the volume control back plate to your template then mark off and drill the back plate fixing holes before fitting the back plate to the wall.

Secure both the valve body and the volume control to their back plates by tightening the grub screws. Then tighten all supply connections.

Fit riser to volume control body marking off, drilling and fixing riser bracket at the desired height.

The temperature of the valve is factory set at approximately 110°F. To fit the lever or cross top control to the unit simply locate the central screw through the lever or cross top into the spline adaptor and ease onto the spline and replace the cover.

Additional information

This thermostatic valve is suitable for use with all water systems up to a maximum operating pressure of 72 p.s.i., (beyond which we recommend pressure reducing valves be fitted).

The valve has check valves fitted on both hot and cold inlets within the valve. Filters are fitted within both supply elbows.



IMPORTANT

It is essential that both hot and cold supply lines are thoroughly flushed before installation.

In hard water areas it is recommended that a suitable water filtration unit be fitted.

SAMUEL HEATH
for a life less ordinary

samuel-heath.com

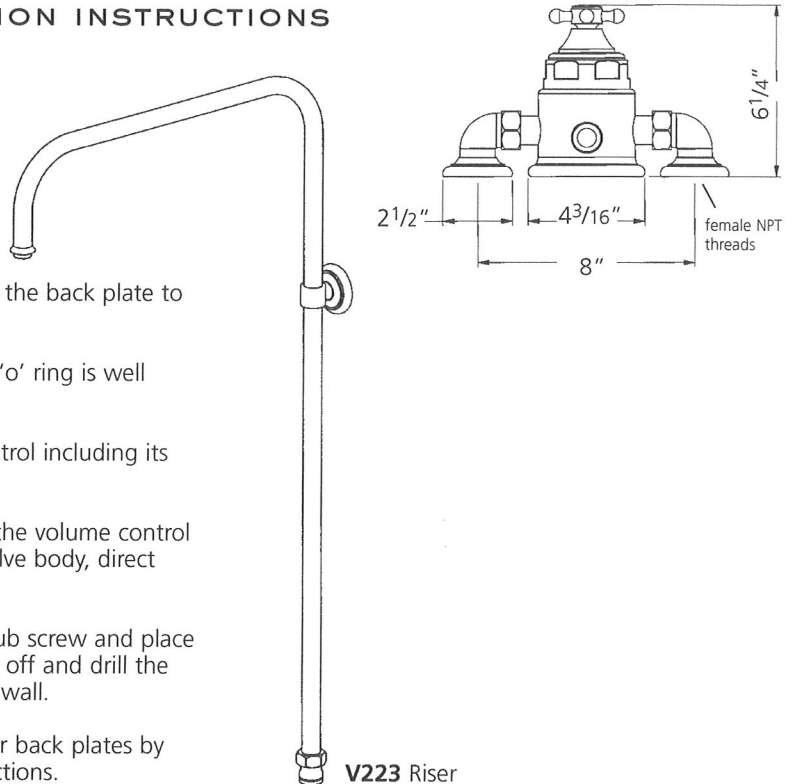


V223 Riser

V222 Volume control and backplate



V296 Valve-valve coupler

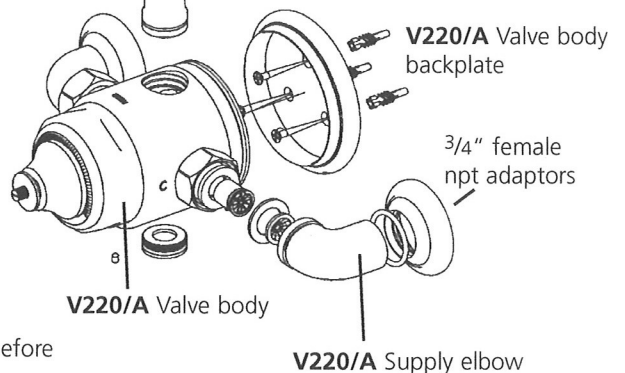


V220/A Valve body

V220/A Valve body backplate

3/4" female npt adaptors

V220/A Supply elbow

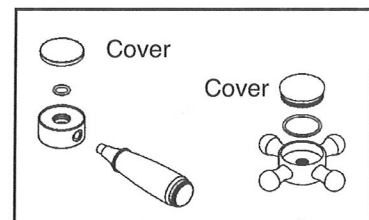

Choice of Lever / Crosstop